



Product Description:

This wall light has a slim and low profile design which provides safe and a visually appealing lighting experience. Quick mount structure for contractors to work safely and easily in the confined-space areas. It is a perfect solution to replace 100 metal halide lamp with a benefit of low maintenance cost.

Line Drawing

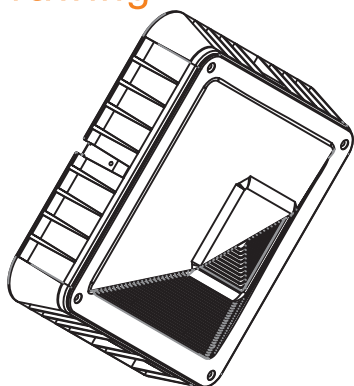

Dimensions

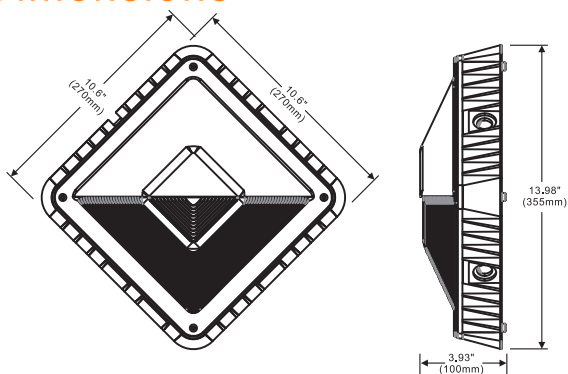

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized power coated finish

LENS

High-impact acrylic diffuser

MOUNT

Unique quick mount design

OPTIONS

Glare - free

Finish - Bronze. Color option with adder

SPECIFICATION

Model No.	▶	LED-3965-M
System watts	▶	54
Lumen Output	▶	7018 lm**
Color	▶	5000K
MA	▶	1400 MA
Input Voltage	▶	120~277V
CRI	▶	70+
Starting Temp	▶	-40°C
Equivalent	▶	150W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.