

### Product Description:

Optional wide / narrow reflector The slim and sweeping-curve design provides low wind resistance, thus maximize wind load requirements. Its sides are constructed by die-cast aluminum while its patented centerpiece is designed to maximize heat dissipation from the LED light engine. This technology allows the fixture to run cooler maximizing LED and driver operating life. The powder coated "BodyGuard" finish provides excellent protection. "BodyGuard" finish also provides an industry-first 5-year limited warranty on paint.

Optional Kelvin color\* with adder.

### AVAILABLE OPTIONS



U-bracket




120°




40°

### Line Drawing

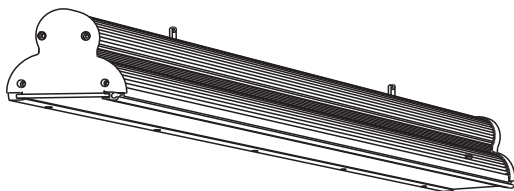

### Dimensions

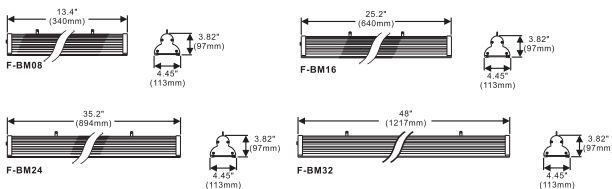

### Features:

#### LISTING

UL and CUL listed for wet locations

#### HOUSING

Consisting of an extruded aluminium alloy body

#### FINISH

UV stabilized powder coated finish

#### LENS

Highly impact resistant tempered glass

#### OPTIONS

Anodized aluminum reflector

Finish - Bronze

### SPECIFICATION

Model No.	F-BM08	F-BM16	F-BM24	F-BM32
System watts	10	21	33	40
Lumen Output	720 lm**	1440 lm**	2160 lm**	2880 lm**
Color	5000K			
MA	350MA			
Input Voltage	120~277V			
CRI	70+			
Starting Temp	-40°C			
Equivalent	50W MH	50W-70W MH	100W MH	100W-150W MH

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.