




### AVAILABLE OPTIONS




Photo Control Thru Wiring Quick mount Pole mount U Bracket

### Line Drawing

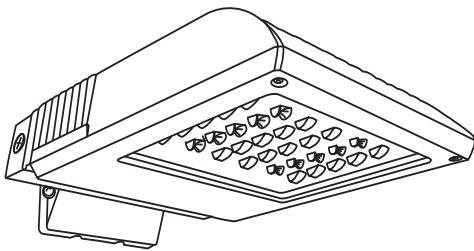

### Dimensions

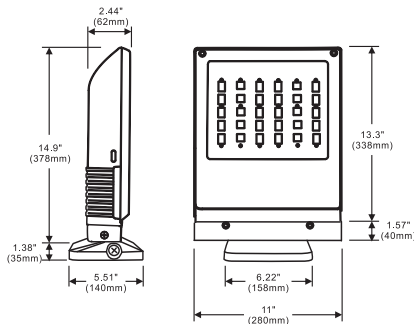

### Product Description:

Utilizing a clean design formula the performance is appropriate for environments where elegance is required. with a strategic lens providing various light distributions along with newest generation of LED module, this fixture is sufficient to provide the desired illumination when required. Ideally used for illumination of walkways, parking lots, and other public places .This unit is uniquely designed with front hinged door frame for easy maintenance and it's own J-box for thru-wiring.

Optional Kelvin color\* with adder.

### Features:

#### LISTING

UL and CUL listed for wet locations

#### HOUSING

Solid construction die-cast aluminum body

#### FINISH

UV stabilized power coated finish

#### LENS

Front hinged door frame

#### OPTIONS

Optional optical lenses available with adder

Finish - Bronze. Color option with adder

### SPECIFICATION

Model No. ▶	LED-757
System watts ▶	59
Lumen Output ▶	5955 lm**
Color ▶	5000K
MA ▶	500 MA
Input Voltage ▶	120~277V
CRI ▶	70+
Starting Temp ▶	-40°C
Equivalent ▶	200W MH

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.