



## LED Surface Mount Light LED-1505B



Architectural design incorporated with high performance LED light engine, This luminaire performs efficiently and steadily in any given environment. Uniform light distribution is delivered through a frosted diffuser. It is ideally used for condos, apartments, hotels, porches, and is suitable for indoor and outdoor spaces to replace old-fashioned incandescent Jelly Jars.

Optional Kelvin color\* with adder.

### AVAILABLE OPTIONS



Optional photo control



Quick mount

### FEATURES

#### LISTING

UL and CUL listed for wet locations

#### HOUSING

Die-cast aluminum body

#### LEDS

New generation COB technology

#### FINISH

UV stabilized powder coated finish

#### LENS

High - impact polycarbonate diffuser

#### OPTIONS

Optional photo control-120V only with adder

Finish - Bronze. Color option with adder


#### Installation

Quick mount installation


### SPECIFICATION

Model No. ▶	LED-1505B
System watts ▶	12
Lumen Output ▶	1400 lm**
Color ▶	5000 K
MA ▶	300 MA
Input Voltage ▶	120~277V
CRI ▶	70+
Starting Temp ▶	-40°C
Equivalent ▶	50W MH

### DIMENSIONS

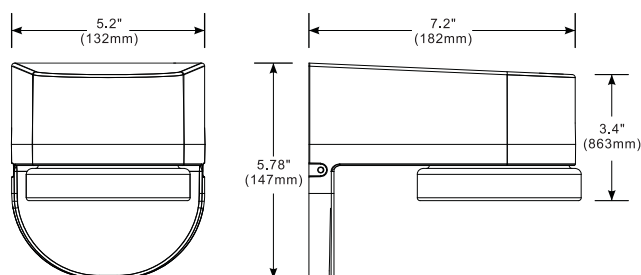

### LINE DRAWING



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.