



AVAILABLE OPTIONS



Vandal Shield




Wire Guard




Visor

Line Drawing



Dimensions

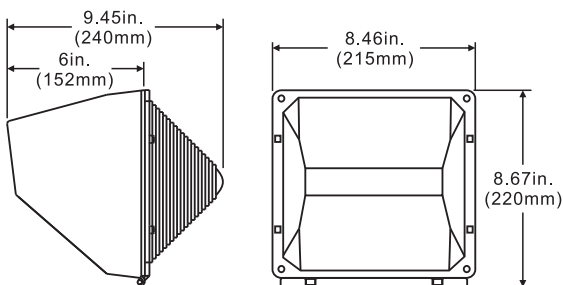

Product Description:

Utilizing the latest generation of LED chips, this uniquely designed wallpack delivers a similar light output to a 100W metal halide but with only 1/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment. It is attractive in appearance and performance.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Die-cast aluminum body

LEDS

New generation COB technology

FINISH

UV stabilized powder coated finish

LENS

Heat and impact resistant borosilicate glass

OPTIONS

Finish - Bronze. Color option with adder

Optional vandal shield / wire guard / visor with adder

SPECIFICATION

Model No.	SML-704-L1
System watts	29
Lumen Output	3383 lm**
Color	5000K
MA	700 MA
Input Voltage	120~277V
CRI	70+
Starting Temp	-40°C
Equivalent	100W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.