

Grandlite®
HIGH POWER LIGHTING SYSTEM

LED Post Top Light

LED-9800



APPLICATIONS

	Street & Tunnel
	Park
	Gas Station
	Parking
	Industrial Site



CITIZEN
Micro HumanTech



2018-04

Product Description:



Cooling channels allow vertical airflow



Optional Mount



Photo control



480V Max
Receptacle

Product Description:

Ideal for parks, walkway, and commercial office buildings, applications where landscape lighting may come into use.

Optional Kelvin color* with adder.

Features:

LISTING

- UL and CUL listed for WET LOCATIONS.

HOUSING

- Corrosion resistant heavy duty-cast aluminum construction. Standard 2 3/8" open on the bottom. Pass 3 G vibration testing.
- Wiring Compartment on the Top for easy access and ease of installation.

FINISH

- Superior powder coat finish to withstand the toughest weather

OPTIONS

- Precision injection-molded, UV polycarbonate Optic Lens
- Optional photocell with adder
- Optional 347V with adder



Specification:

Example: LED-8510-PT150UNV740T5-XSBZ

Model No.	SystemWatts	Input Voltage	CRI	Color Temp	Distribution	Option	Finish	Starting Temp
						Accessories		
LED-9800	053=53W 078=78W 143=143W	UNV=120-277V	7=70+	40=4000 K 50=5000 K	T5=Type VS	XS=10kv Surge OS=Occupancy Sensor	BZ=Bronze WT=White	-40°C




* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to $\pm 10\%$.

Performance Data

Model No.	Light Beads	System Watts	Dist. Type	Lumens	Lpw	B	U	G
LED-9800	L240	53W	Type VS	6814 lm**	126 lm/W	4	3	3
	L336	78W	Type VS	9506 lm**	129 lm/W	4	3	3
	L432	143W	Type VS	15408 lm**	130 lm/W	4	3	3

Dimension:

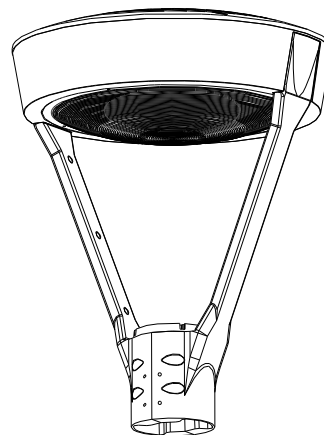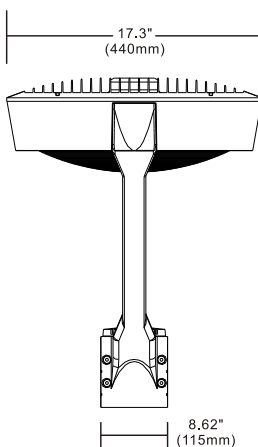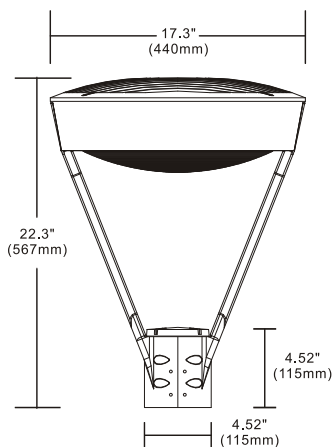

505 S. Yorbita Road, City of Industry, CA 91744, USA
Tel: (626) 839-8868 Fax: (626) 581-8099
e-mail: sales@grandlite.com

www.grandliteled.com