




Product Description:

Heavy-Duty one complete piece die cast provides maximum heat dissipation. Cooling fins are added to increase the ambience temperature to 50C standard.





Die cast Hook is standard with the unit, saving time and money for the end customer. Pendant mounting option is also available, making the fixture more versatile.

Standard SE cable is included with the unit and provides the contractor with easy of installation



Uniquely designed prismatic lens provides ideal lighting coverage and minimum glare.



Bi-Level Occupancy sensor no only offers energy saving, but provide security to your warehouse as well. The fixture meets and comply with CA Title 24.

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Product Description:

This powerful luminaire has been designed to meet diversified installation requirments. It can be used as a flood light and an area light. With built in heatsinks on the back of the luminaire, the LED-2810 provides truly spectacular light while keeping the LEDs at a cool temperature.

Optional Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Die-cast aluminum and extruded aluminum body

LEDS

New generation LED module

FINISH

UV stabilized powder coated finish

LENS

Optional NEMA 3, NEMA 5, NEMA 7 optics with adder

OPTIONS

Optional 347V with adder

Dimmable option with adder

Finish - Bronze. Color option with adder

Performance Data


Model NO.	System Watts	Dist. Type	Lumens	Lpw
LED-2810-H	362W	NEMAT	54997 lm**	152 lm/W
	425W	NEMAT	64375 lm**	151 lm/W
	505W	NEMAT	76394 lm**	151 lm/W

Specification:

Example: LED-2810-H

Model No.	System Watts	Input Voltage	CRI	Color Temp	Option	Finish	Starting Temp
LED-2810-H	362=362W	UNV=120-277VAC	7=70+	40= 4000 K	XS=10kv Surge	BZ=Bronze	-40°C
	425=425W			50=5000 K			
	505=505W						

Dimension:

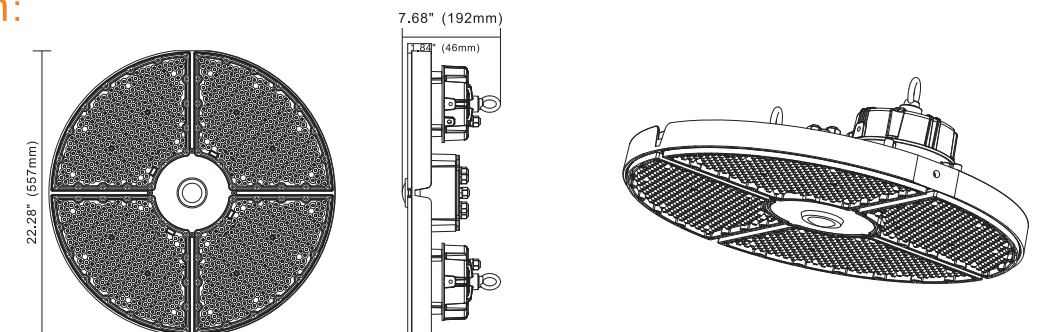

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.