




APPLICATIONS

	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges

Product Description:

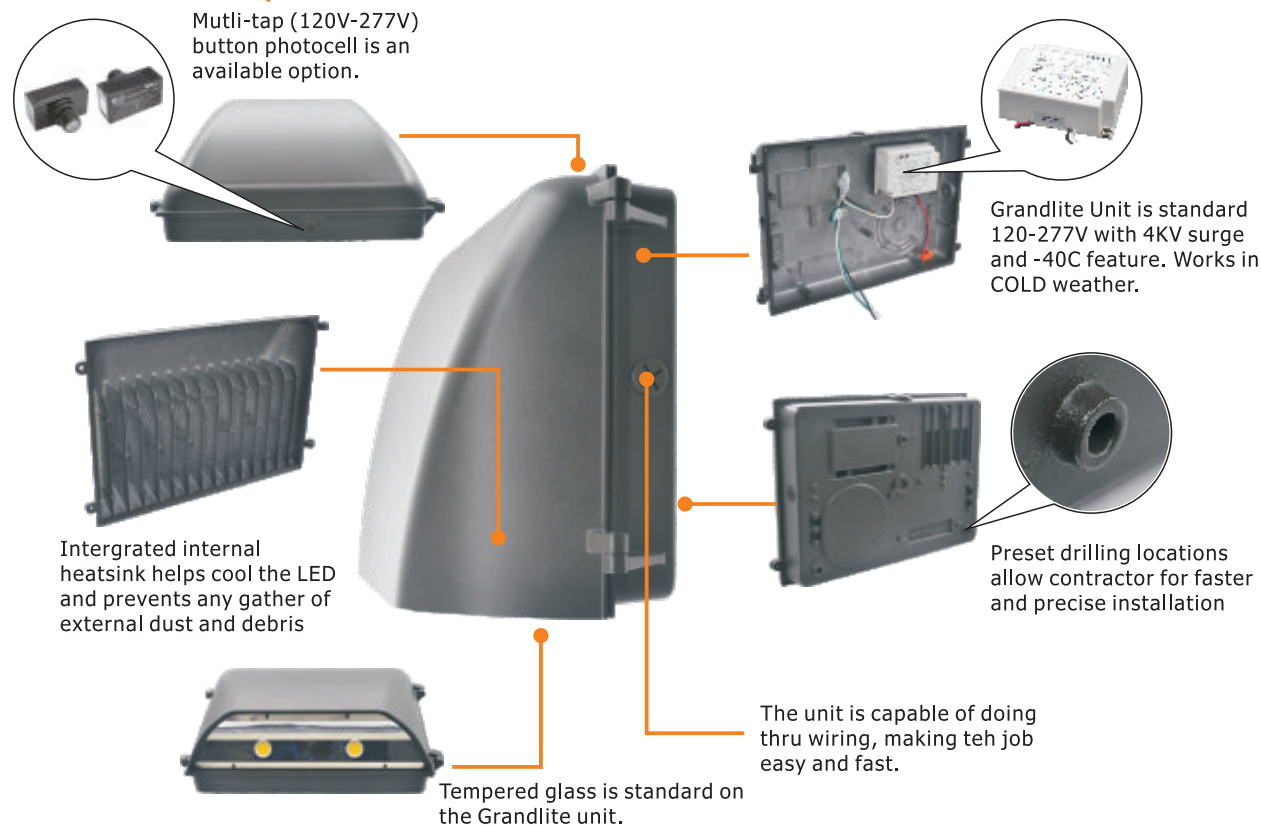

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Product Description:

This newly designed luminaire with built-in heatsink in casting featuring its versatility that can be served as wall light, flood light and etc. Incorporated with high performance Led module along with high quality optical reflector, this fixture performs efficiently and steadily against harsh outdoor environment .

Optional Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized powder coated finish

LENS

High-impact resistant tempered glass

OPTIONS

Optional photo control with adder

Finish - Bronze. Color option with adder

Performance Data


Model NO.	System Watts	Dist. Type	Lumens	Lpw	B	U	G
LED-1160	27 W	Type II	3849 lm**	142 lm/W	2	3	3
	40 W	Type II	5017 lm**	125 lm/W	2	3	3
	49 W	Type II	6272 lm**	128 lm/W	2	3	3
	74 W	Type II	9896 lm**	134 lm/W	2	3	3

Specification:

Example: LED-1160

Model No.	System Watts	Input Voltage	CRI	Color Temp	Option	Feature	Finish	Starting Temp
LED-1160	027=27W 040=40W 049=49W 074=74W	UNV=120-277V	7=70+	40=4000 K 50=5000 K	XS= 10kV Surge 2S= 20kV Surge	W =Wall Mount	Bronze	-40°C ~ +50°C

Dimension:

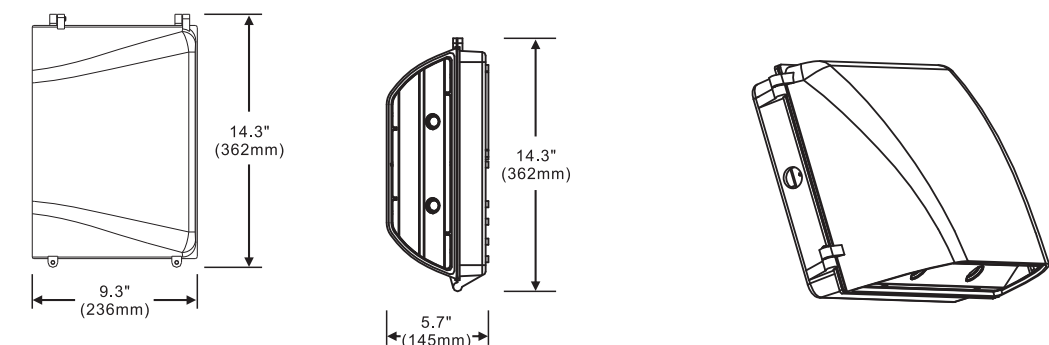

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.