



Product Description:

Utilizing the latest generation of LED chips, this uniquely designed wallpack delivers a similar light output to a 150/250W metal halide but with only 1/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment, It is attractive in appearance and performance.

Optional Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Die-cast aluminum body

FINISH

UV stabilized powder coated finish

LENS

Heat and impact resistant tempered glass


OPTIONS

Optional 347V with adder


Optional surge protector 10K with adder

Finish - Bronze. Color option with adder

Line Drawing

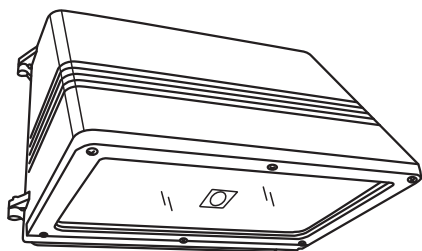

Dimensions

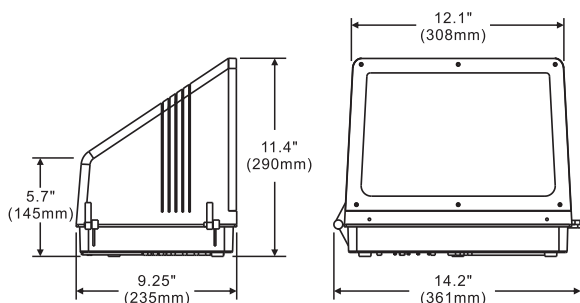

SPECIFICATION

Model No.	SML-311-L1	SML-311-L1	SML-311-L2
System watts	41	53	79
Lumen Output	4469 lm**	5588 lm**	8903 lm**
Color	5000K		
MA	950 MA	1200 MA	950 MA
Input Voltage	120~277V		
CRI	70+		
Starting Temp	-40°C		
Equivalent	150W MH	200W MH	250W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.