



The LED-787 is a powerful luminaire that has been designed to meet a wide variety of installation locations. With the various mounting options it can be used as a flood light or as an area light. With the LEDs mounted on the large heatsinks the fixture can maximize a high lumen output while keeping the LED modules at a cool temperature.

Optional Kelvin color* with adder.

AVAILABLE OPTIONS



Slip Fitter



Trunnion




U Bracket



Pole mount

FEATURES	SPECIFICATION						
LISTING UL and CUL listed for wet locations HOUSING Heavy duty die-cast aluminum powder coating, corrosion resistant hardware FINISH UV stabilized powder coated finish OPTIONS Optional 347V with adder Optional surge protector 10K with adder Optional NEMA photo control with adder Optional Type II, Type III, Type IV, Type VS optics with adder Finish - Bronze. Color option with adder	Model No. ▶	LED-787 T3	LED-787 T5	LED-787 T3	LED-787 T5	LED-787 T3	LED-787 T5
	System watts ▶	145		199		256	
	Lumen Output ▶	19095 lm**	19618 lm**	28429 lm**	28915 lm**	34857 lm**	35671 lm**
	Color ▶	5000 K					
	MA ▶	900 MA		860 MA		1100 MA	
	Input Voltage ▶	120~277V/347V					
	CRI ▶	70+					
	Starting Temp ▶	-40°C					
	Equivalent ▶	250W MH		400W MH		400~600W MH	

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

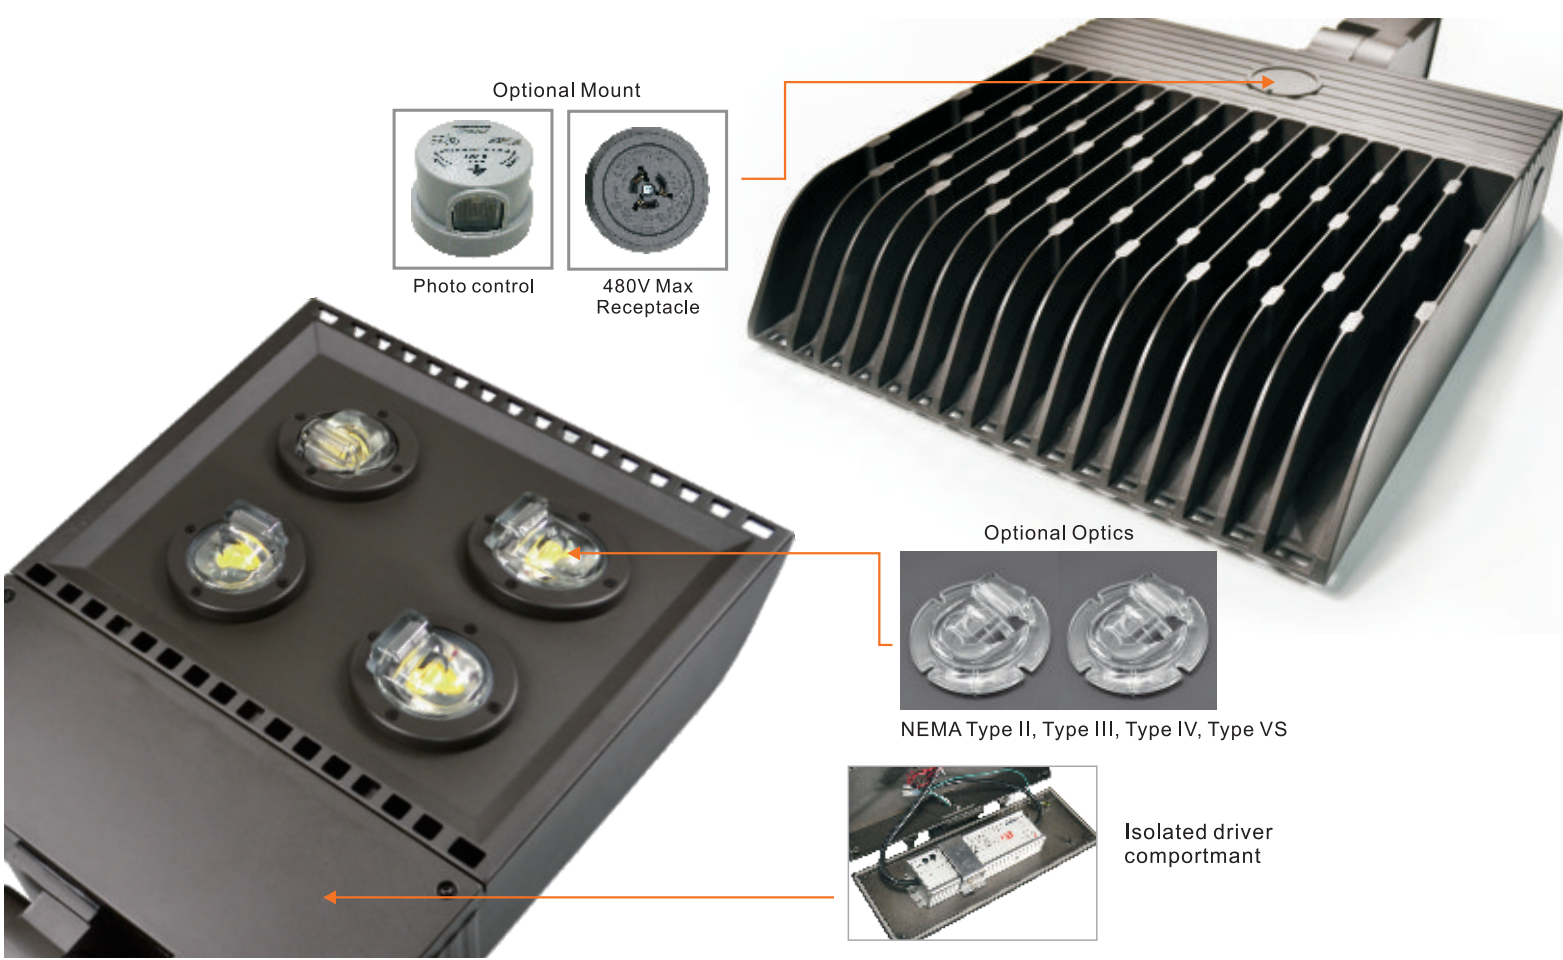

DIMENSIONS	LINE DRAWING

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.