

This newly designed luminaire with built-in heatsink in casting featuring its versatility that can be served as wall light, flood light and etc. Incorporated with high performance Led module along with high quality optical reflector, this fixture performs efficiently and steadily against harsh outdoor environment .

Optional Kelvin color* with adder.

AVAILABLE OPTIONS



Thru Wiring



Photo Control



Quick mount



Trunnion



Brackets



Slip fitter

FEATURES

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized powder coated finish

LENS

High-impact resistant tempered glass

OPTIONS


Optional photo control with adder
Finish - Bronze. Color option with adder

SPECIFICATION

Model No.	LED-1860-L1		
System watts	21	30	42
Lumen Output	2169 lm**	3286 lm**	3908 lm**
Color	5000 K		
MA	480 MA	700 MA	950 MA
Input Voltage	120~277V		
CRI	70+		
Starting Temp	-40°C		
Equivalent	100W MH	100W-150W MH	200W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

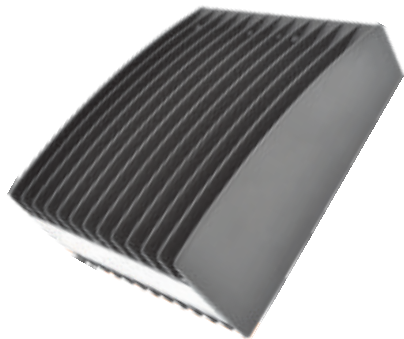


LED-1860-L1



LED-1860-TR L1




LED-1860-SFS L1

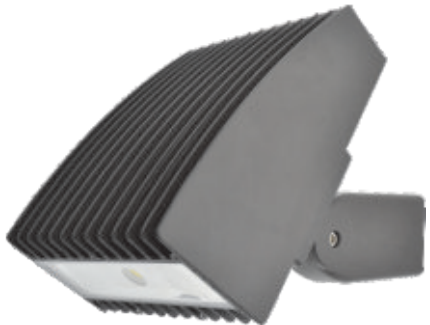


LED-1860-SFB L1

DIMENSIONS

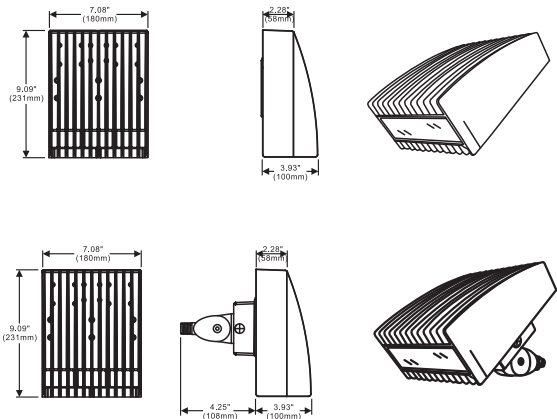

LINE DRAWING

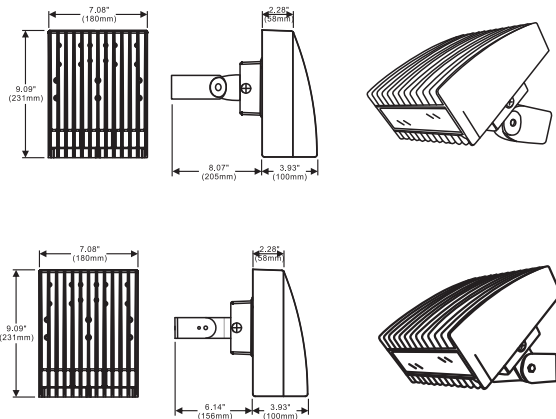

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.