


Ideal for locations of office building, supermarket, exhibition center, meeting room, factory building, wherever extra light is needed. Designed for surface, pendant, stem or chain hanging. Mounting holes are provided for simple, fast installation.


Optional Kelvin color\* with adder.



LED-HB-160

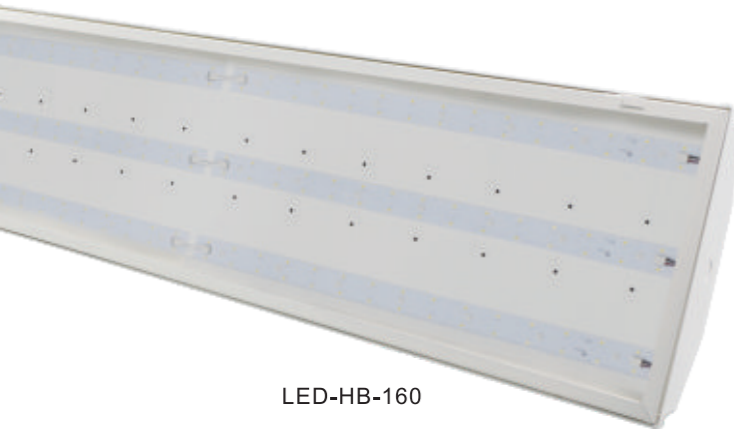

LED-HB-210

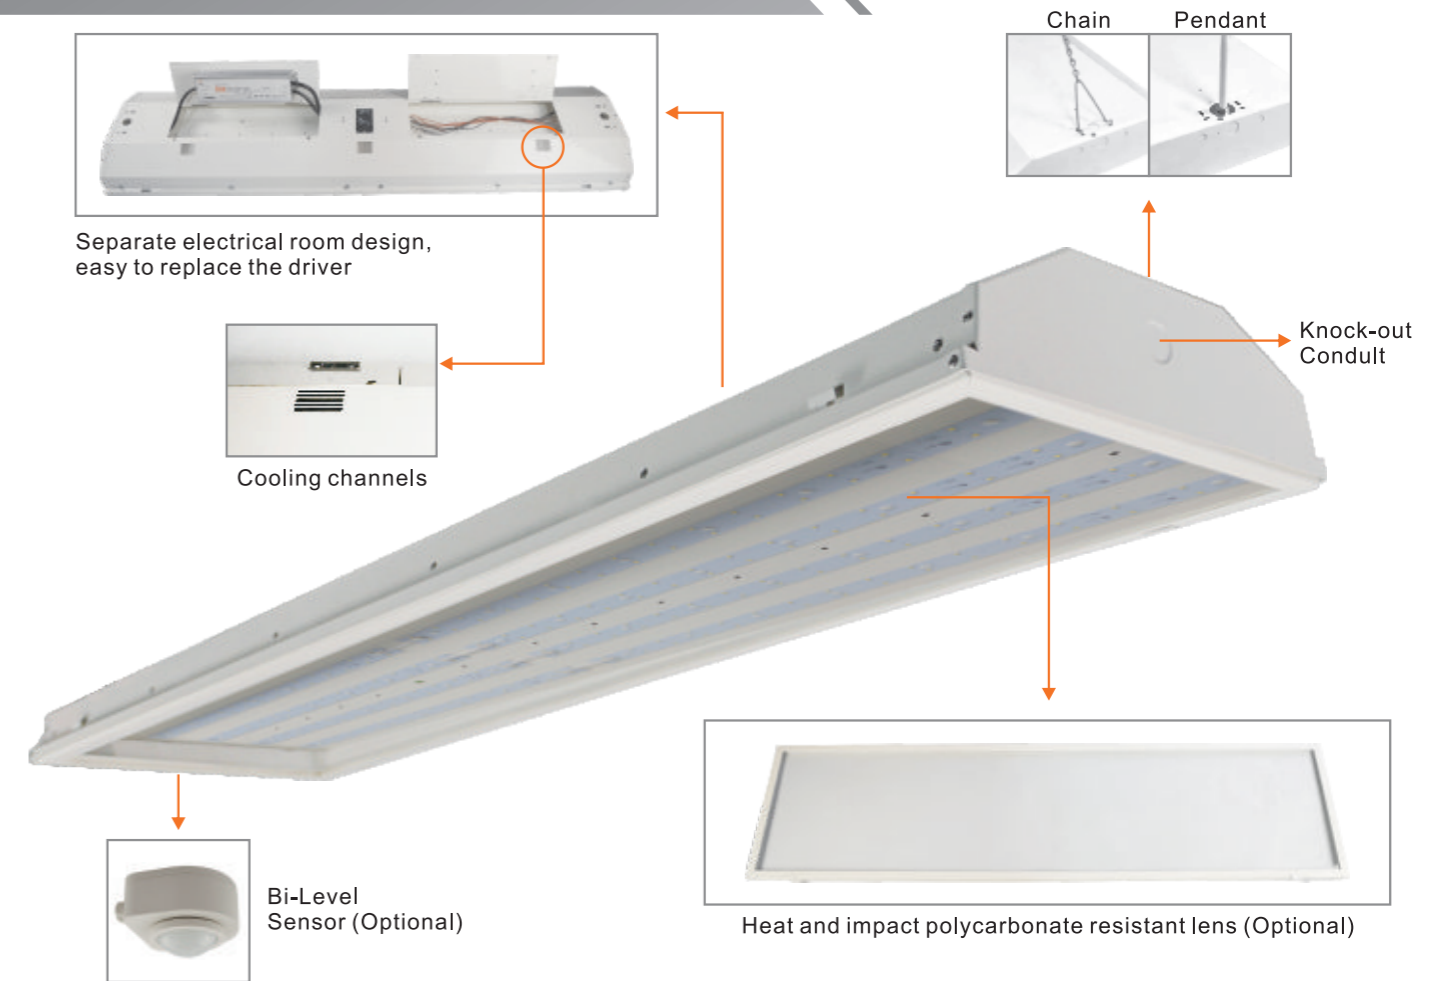

**FEATURES**


- LISTING**  
UL and CUL listed
- HOUSING**  
Housing was made of high quality steel  
Accepts, stem, pendant or chain mount
- FINISH**  
UV stabilized powder coated finish
- OPTION**  
Optional lensed door protects the lamp that outside contact and is hinged  
Optional Heat and impact polycarbonate clear lens  
Optional 347V with adder/480V  
Optional motion sensor can be specified in the factory or field installed.

**SPECIFICATION**


Model No.	LED-HB-120	LED-HB-160	LED-HB-210
System watts	120	161	226
Lumen Output	15760lm**	20610lm**	28505lm**
Color	5000K		
MA	145MA	135MA	135MA
Input Voltage	120~277V		
CRI	70+		
Starting Temp	-40°C		
Equivalent	250W MH	400W MH	600W MH

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

**DIMENSIONS**

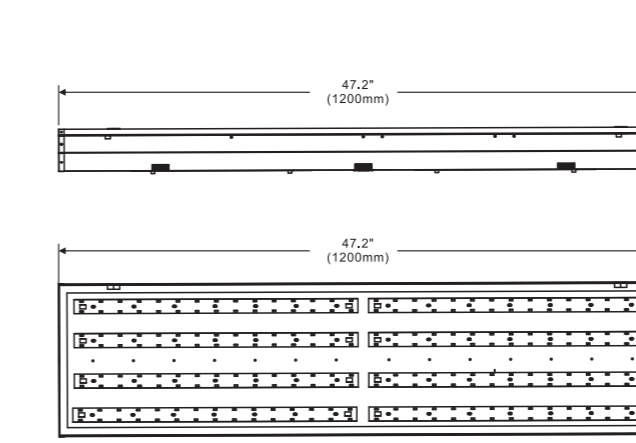

**LINE DRAWING**

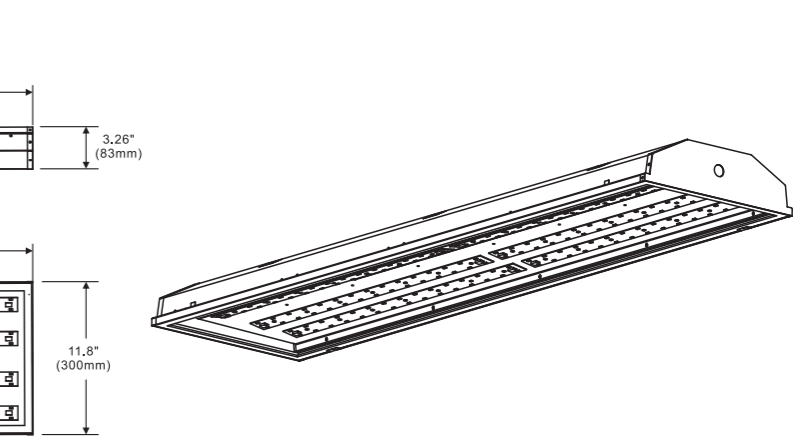

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.