Grandlite®
HIGH POWER LIGHTING SYSTEM

LED Surface Mount Light

SML-707

Product Description:

Utilizing the latest generation of LED chips, this uniquely designed wall pack delivers a similar light output to a 250 W metal halide but with only l/3 energy consumption. Housing made of die-casting aluminum with reliable powder coating specifically for harsh outdoor environment. It is attractive in appearance and performance.

AVAILABLE OPTIONS



Wire Guard

Visor

Line Drawing



Dimensions

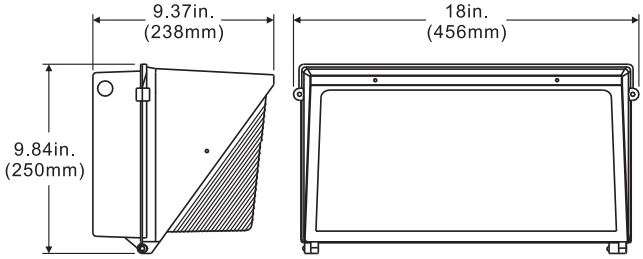

Features:

LISTING
UL and CUL listed for wet locations
HOUSING
Die-cast aluminum body
FINISH
UV stabilized powder coated finish
LENS
Heat and impact resistant borosilicate glass
OPTIONS
Optional 347V with adder
Dimmable option with adder
Finish - Bronze. Color option with adder
Optional wire guard / visor with adder

SPECIFICATION

	SML-707-L2	SML-707-L3
Model No.	SML-707-L2	SML-707-L3
System watts	73	105
Lumen Output	9752 lm**	12650 lm**
Color	5000 K	5000 K
MA	950 MA	700 MA
Input Voltage	120~277V	120~277V
CRI	70+	70+
Starting Temp	-40°C	-40°C
Equivalent	250W MH	400W MH

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.
** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

CITIZEN Micro HumanTech
Powered by CREE LEDs
cULus LISTED