



LED-27030-SFS


LED-27060-TR  
LED-27080-TR

LED-27150-SF

Meets DLC 5.1 Requirements



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

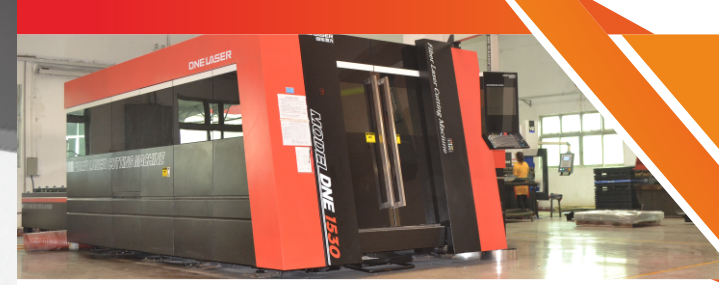

**Product Description:**



Select from 3 Beam Angles: 60°/80°/100°



60°



80°



100°

Die-cast aluminum heatsink ensures optimal heat dissipation, keeping the fixture cool to the touch



Easy access to the control switch for a range of CCTs and wattages to choose from.

High-transparency tempered glass delivers optimal light distribution



Easy access to photocell switch.

Slip Fitter and Knuckle mounting option available.

**Product Description:**

This compact yet powerful flood light combines practical innovation with modern aesthetics. An upgraded tuning switch offers easy access to a range of CCT and wattage settings, adaptable to various environments. With high-performance optics and a durable, long-lasting driver, these landscape flood lights are built to provide reliable illumination for years to come.

**Features:**

- LISTING**
- ▶ UL and cUL listed for wet locations
- HOUSING**
- ▶ Solid construction die-cast aluminum body
- FINISH**
- ▶ UV stabilized powder coated finish
- OPTIONS**
- ▶ Optional photocell
- ▶ Finish - Bronze. Color options with adder

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.





# Grandlite®

HIGH POWER LIGHTING SYSTEM

## LED Flood Light

### LED-27XXX



# Grandlite®

HIGH POWER LIGHTING SYSTEM

## LED Flood Light

### LED-27XXX

### Performance Data:

Model No.	Nominal Wattage	Lumens*	Efficacy*	Beam Angle
LED-27030	30/20/10W	3990 lm*	137.8 lm/W*	60° / 80° / 100°
LED-27060	60/45/30W	8779 lm*	152.8 lm/W*	
LED-27080	80/60/40W	11816 lm*	156.7 lm/W*	
LED-27150	150/120/105W	23255 lm*	163.17 lm/W*	



\*Lumen Output and Efficacy are based on the highest wattage at 4000K with 100° Beam Angle

### Specification:







Example: LED27030VA030[UNV,HV3]8TXN6ST-XXXXXX

Model No.	Nominal Wattage	Input Voltage	CRI	Color Temp*	Mounting	Finish	Operating Temp
LED-27030	30=30W	UNV= 120-277VAC	8=80+	TX= 30=3000K	SF=Slip Fitter SFS=Knuckle TR=Trunnion	BN=Bronze	-40°C~ +40°C
LED-27060	60=60W	HV3= 120-347VAC		40=4000K			
LED-27080	80=80W	HV4 = 277-480VAC		50=5000K			
LED-27150	150=150W						

### Dimension:

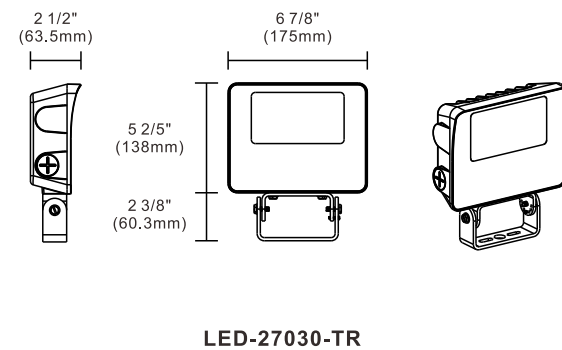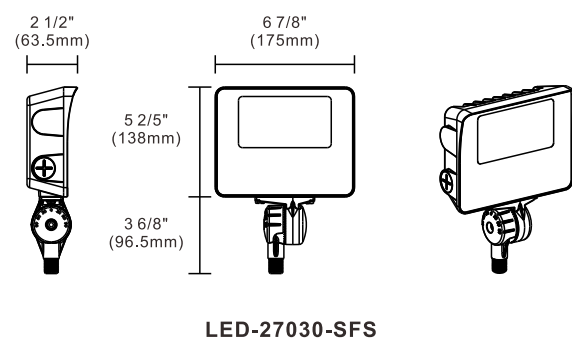

### Dimension:

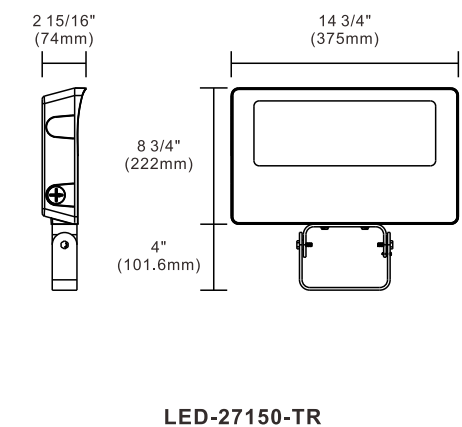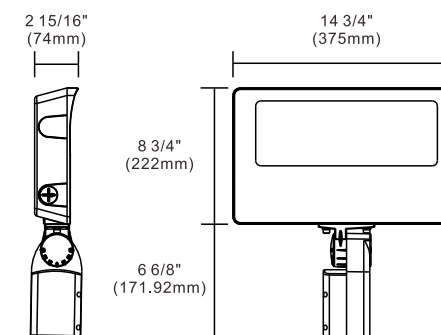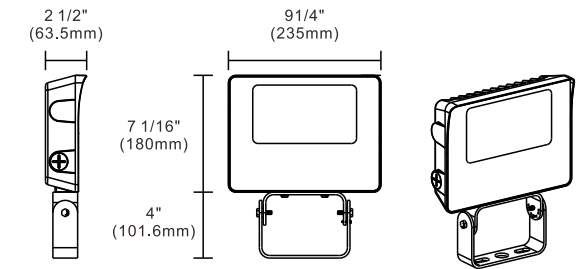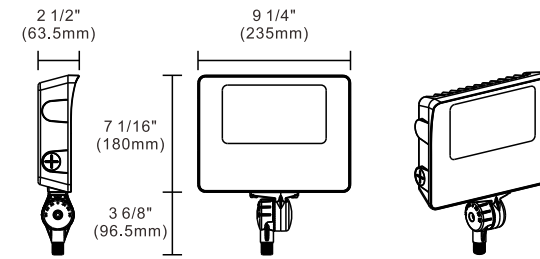

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
 \*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
 \*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.