




GRPL-5510

GRPL-5520

Meets DLC 5.1 Requirements

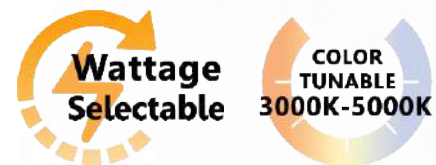

**Product Description:**


Extruded aluminum tube provides strength and durability as well as protects and conceals the component wiring

Terminal block provided on the base bracket for easy installation

Quick disconnect located near the terminal block for simple connection to the LED driver.

Easy access to the control switch for a range of CCTs and wattages to choose from

Versatile mounting plate allows for easy installation and replacement for any project or development

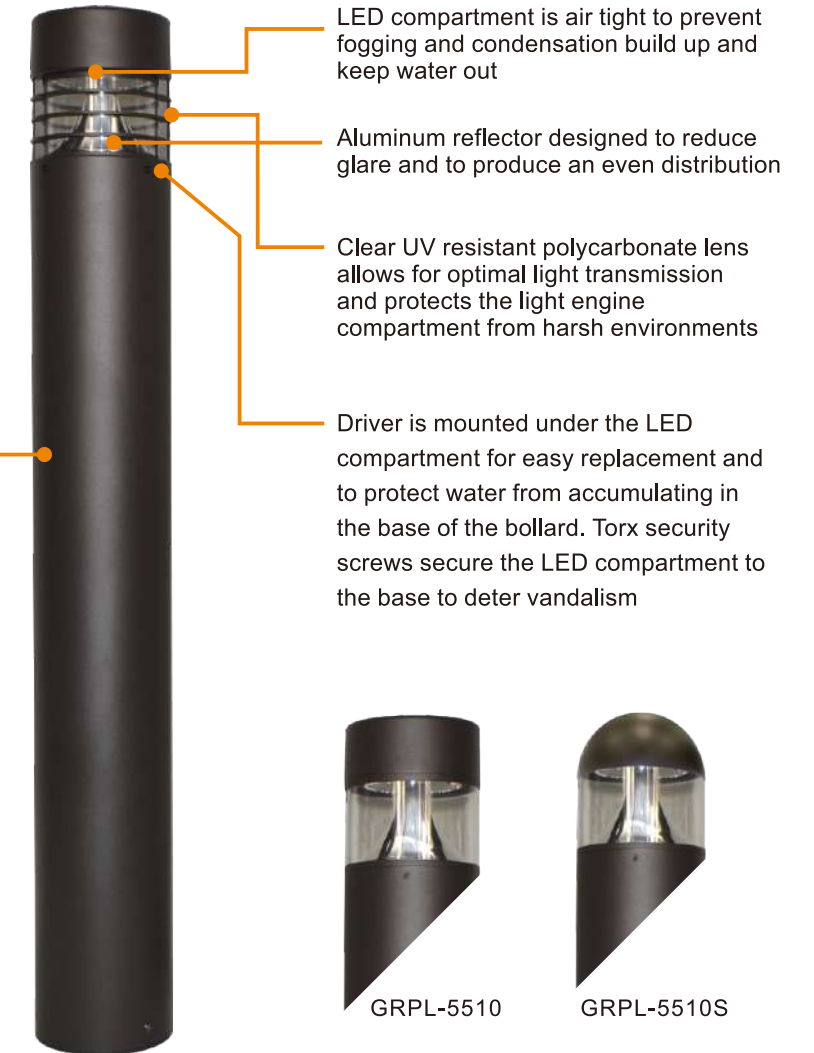

GRPL-5510

GRPL-5510S



GRPL-5520

GRPL-5520S



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



**Grandlite®**  
HIGH POWER LIGHTING SYSTEM  
**LED Bollard**  
GRPL-5510 / 5520



**Grandlite®**  
HIGH POWER LIGHTING SYSTEM  
**LED Bollard**  
GRPL-5510 / 5520

**Product Description:**

This attractive and newly redesigned heavy-duty bollard features a full proof aluminum constructed housing. It provides corrosion and vandal resistance that is not only ideal for lighting pedestrian walkways, but also for accenting the exterior ground of office and apartment buildings, hotels and parks. A solid foundation withstands the element and driver even in the worst weather conditions. The upgraded color tuning switch allows easy access to a range of CCTs based on different environments.

**Features:**

- LISTING**  
UL and CUL listed for wet locations
- HOUSING**  
Consisting of an extruded aluminium alloy body  
Standard 4kV Surge
- FINISH**  
UV stabilized powder coated finish
- LENS**  
High-impact polycarbonate diffuser
- OPTIONS**  
Anodized aluminum reflector  
Finish - Bronze  
Build in color adjustable control ranging from 3000K to 5000K

**Performance Data:**

Model NO.	Nominal Watts	Dist. Type	Lumen*	Efficacy*
GRPL-5510 ( S )	30 / 20 / 10W	Type V	3997 lm*	129 lm/w*
GRPL-5520 ( S )	30 / 20 / 10W	Type V	1252 lm*	42 lm/w*


\* Lumen and Efficacy are based on highest wattage 5000K

**Specification:**

Example: GRPL-5510 / 5520 / 5510S / 5520S

Model No.	Nominal Watts	Input Voltage	CRI	Color Temp	Finish	Starting Temp
GRPL-5510	030=30W	HV3=120-347V	8=80+	30=3000 K	BN=Bronze	-40°C
GRPL-5520				40=4000 K		
GRPL-5510S				50=5000 K		
GRPL-5520S						

**Dimension:**

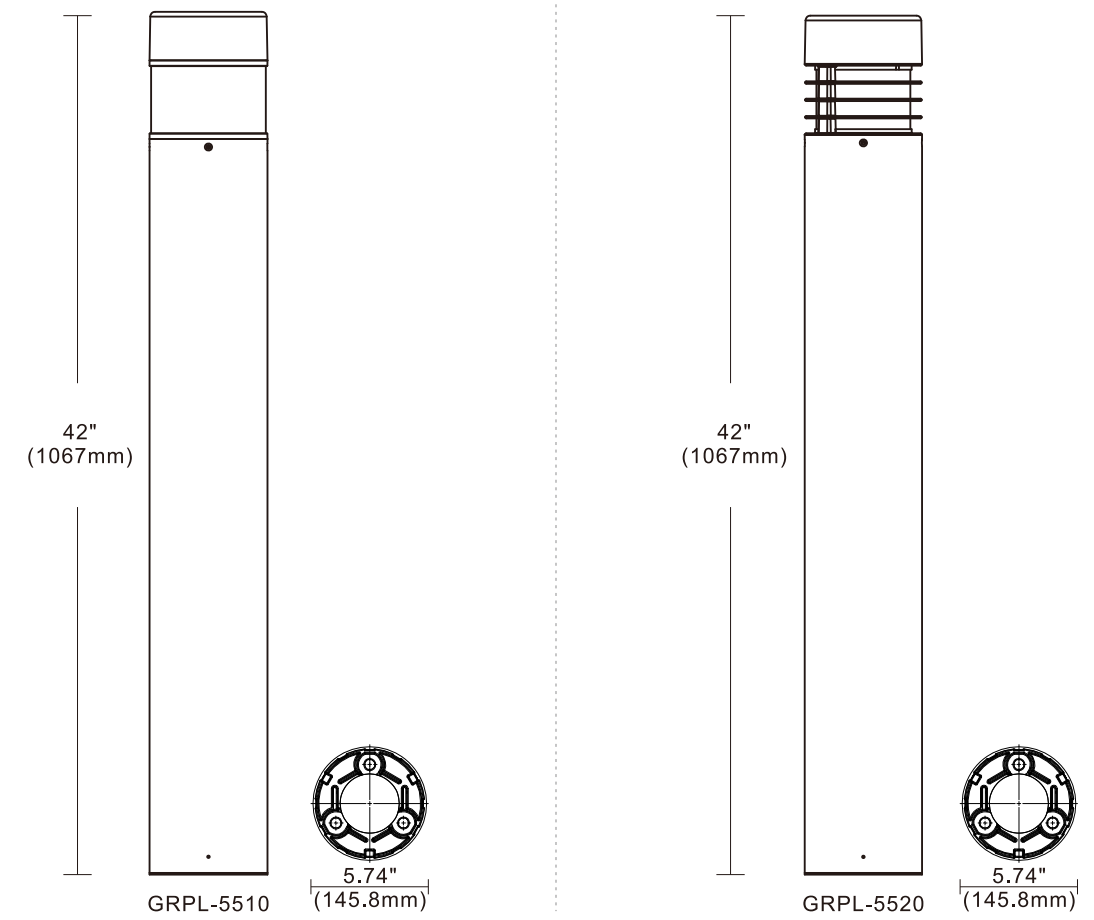

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.  
\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

