




AVAILABLE OPTIONS




25° Optics available

Line Drawing



Dimensions

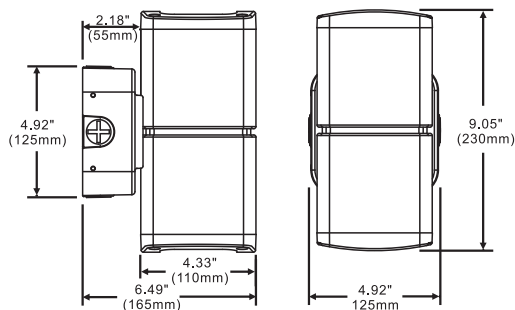

Product Description:

This architectural LED luminaire is suitable for many environments. It can be wall-mounted, pendant-mounted, and canopy-mounted. It can be used for indoor purposes as well as outdoor environments. Utilizing patented heat sink design to lower Tj temperature, this luminaire can last for a very long time with very little lumen depreciation. With various optics available, this product is a lighting designer's perfect companion!

Optional Kelvin color* with adder.

Features:

LISTING

UL and CUL listed for wet locations

HOUSING

Solid construction die-cast aluminum body

FINISH

UV stabilized powder coated finish

LENS

25 degree optic lenses available with adder

OPTIONS

Finish - Gray. Color option with adder

SPECIFICATION

| Model No. | LED-326-D | LED-326-DS |
|---------------|-----------|--------------|
| System watts | 30 | |
| Lumen Output | 2800 lm** | 2750 lm** |
| Color | 5000 K | |
| MA | 350 MA | |
| Input Voltage | 120~277V | |
| CRI | 70+ | |
| Starting Temp | -40°C | |
| Equivalent | 100W MH | 100W-150W MH |

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.